



Eco Friendly



High Performance



Ultra Low Maintenance



Recyclable

ELITO ENERGY

TUBULAR BATTERY



UNIQUE FEATURES

- **HI-COERCE™ HIGH PRESSURE SPINE CASTING (>100 bar)** for superior life
- **PANOPTIC SPINE™** for reduced corrosion leading to longer life
- **SATIATED WET PASTE™** gives higher active material integrity, lowers resistance to deliver consistent power & life
- **SERRATED SEP™** Reduced stratification & float currents provides better performance
- **ULTRA LOW MAINTENANCE**
- **SUITABLE FOR HOME UPS / SOLAR APPLICATIONS**

MADE IN INDIA


SPECIFICATION

| Battery | Normal Voltage (V) | Capacity* @C20(Ah) | Dimensions(mm) | | | Weight ±5% (Kgs) | Terminal Type | Type of Separator | Type of container |
|---------------|--------------------|--------------------|----------------|---------|----------|------------------|---------------|-------------------|--------------------------------|
| | | | Length±2 | Width±2 | Height±2 | | | | |
| ELT-TU-1500TT | 12 | 150 | 500 | 188 | 397 | 56.3 | Terminal-L | PE (Polyethylene) | PPCP(Polypropylene co polymer) |
| ELT-TU-2000TT | 12 | 200 | 500 | 188 | 397 | 59.3 | Terminal-L | PE (Polyethylene) | PPCP(Polypropylene co polymer) |
| ELT-TU-2300TT | 12 | 230 | 500 | 188 | 397 | 64.1 | Terminal-L | PE (Polyethylene) | PPCP(Polypropylene co polymer) |


CHARACTERISTICS

| | |
|-------------------------------------------|------------------------------|
| Float Voltage @ 27°C | 13.8+/-0.2 V |
| Boost Voltage @ 27°C | 14.4+/-0.2 V |
| Max. Charging Current | 30% of rated AH Capacity |
| Self-Discharge @ 30°C | 4% on 28 days of Storage |
| Charge Acceptance @ 27°C (Deep Discharge) | Capacity > 75% |
| Storage period @ 30°C | Min 3 Months Max 6 Months |


DAILY OCV TREND

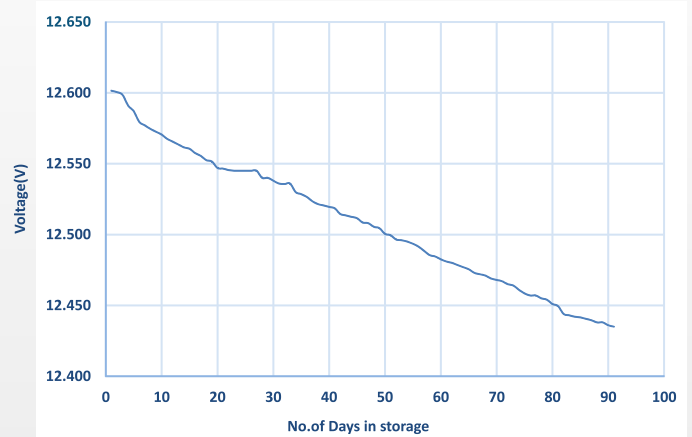

LIFE CYCLE

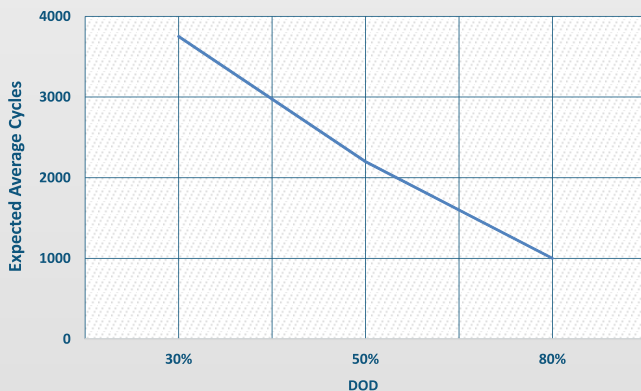

DISCHARGE CHARACTERISTICS

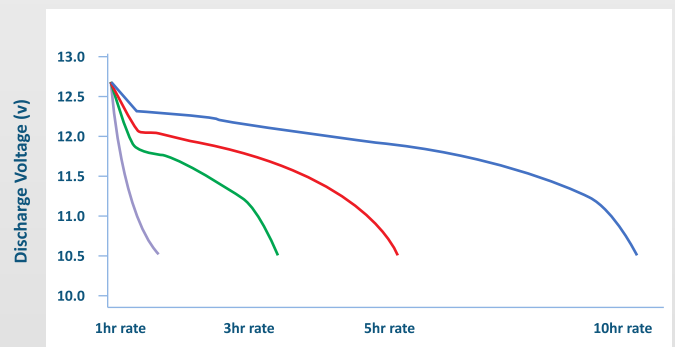


ELITO STORE



PLANT



GLOBAL PRESENCE

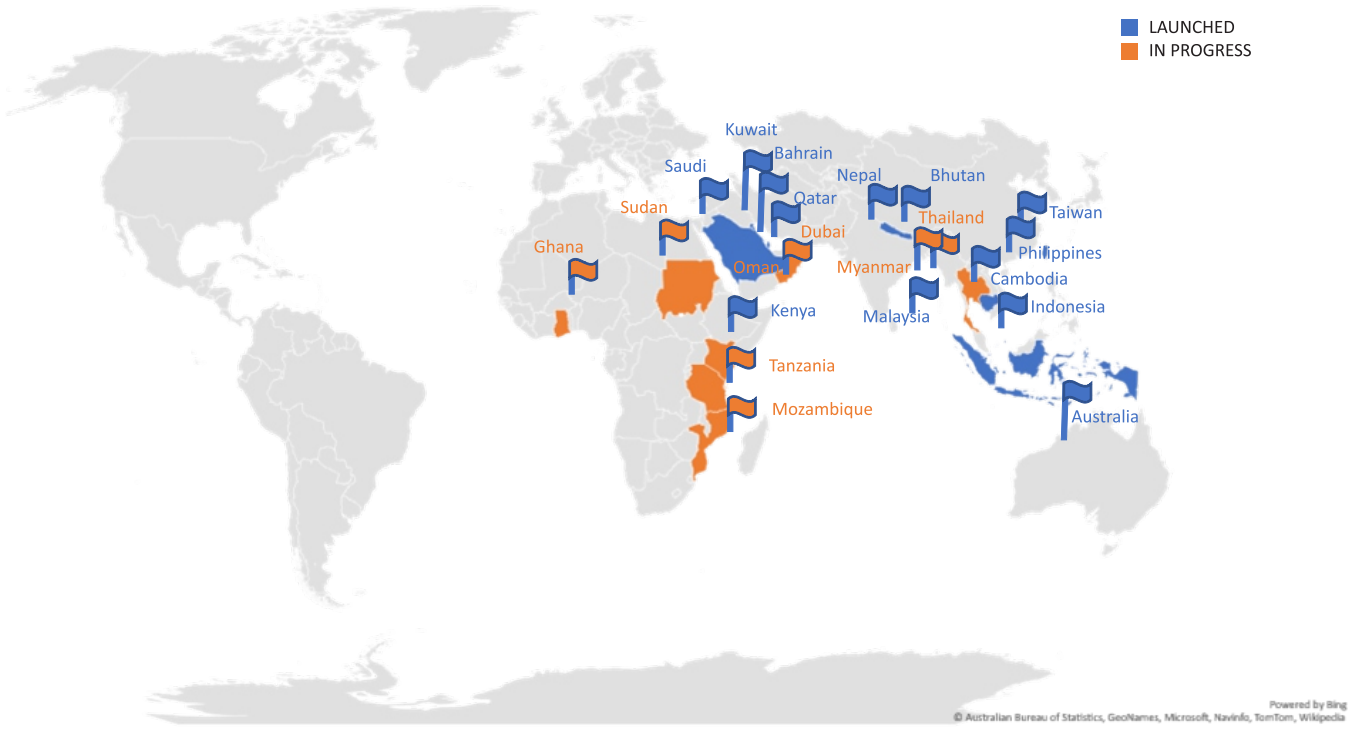

OUR OTHER RANGE OF PRODUCTS



AUTOMOTIVE BATTERIES



COMMERCIAL BATTERIES



2W BATTERIES